

1153700.0000

PLANTA GENERAL

1153750.0000

1153800.0000

1153850.0000

1249400.0000

1249350.0000

1249300.0000

1153700.0000

1153750.0000

1153800.0000

1153850.0000

1249400.0000

1249350.0000

1249300.0000



SAN JOSÉ DE LA MONTAÑA
ANTIOQUIA

LEVANTAMIENTO
VIA VEREDAL

TRAMO 2

VEREDA
EL CONGO

Equipo Técnico

Cesar Rovira
01-15110

Cesar Rovira M.P. 0115-110
CUNDINAMARCA



UBICACION GENERAL



DEPARTAMENTO




MUNICIPIO



REVISÓ:

MUNICIPIO SAN JOSÉ
DE LA MONTAÑA

CONVENCIONES

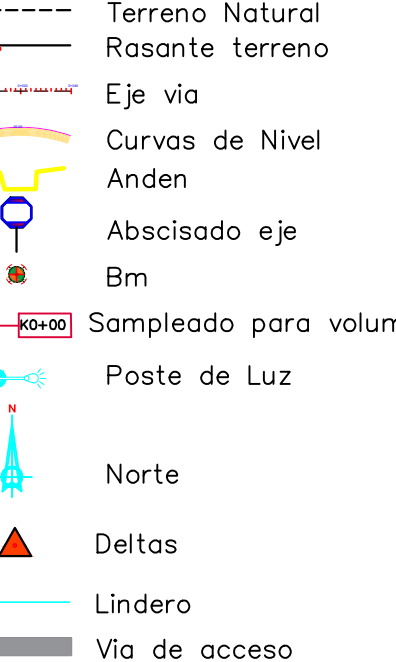

Dibujo: ROVIRA

Fecha 27/07/2022

Scala :ASIGNADA

Lamina

L-03

MOVIMIENTO DE TIERRAS							
PROGRESIVA	Área C. m ²	Área R. m ²	Vol. C. m ³	Vol. R. m ³	Vol. C. Acum. m ³	Vol. R. Acum. m ³	Vol. Neto m ³
0+000.20	15.80	0.00	0.00	0.00	0.00	0.00	0.00
0+005	17.44	0.00	79.73	0.01	79.73	0.01	79.72
0+010	16.13	0.00	83.94	0.00	163.66	0.01	163.65
0+015	15.45	0.00	78.94	0.00	242.61	0.01	242.59
0+020	14.49	0.00	74.83	0.00	317.44	0.02	317.42
0+025	13.60	0.00	70.21	0.00	387.65	0.02	387.63
0+030	12.94	0.00	66.34	0.00	453.99	0.02	453.96
0+035	12.91	0.00	64.61	0.00	518.60	0.03	518.57
0+040	12.86	0.00	64.42	0.00	583.01	0.03	582.98
0+045	12.91	0.00	64.43	0.00	647.44	0.03	647.41
0+050	13.03	0.00	64.85	0.00	712.29	0.03	712.25
0+055	13.12	0.00	65.37	0.00	777.65	0.03	777.62
0+060	13.18	0.00	65.76	0.00	843.41	0.04	843.37
0+065	13.09	0.00	65.69	0.00	909.10	0.04	909.06
0+070	12.34	0.00	63.58	0.00	972.67	0.04	972.63
0+075	11.90	0.00	60.61	0.00	1033.28	0.04	1033.24
0+080	11.78	0.00	59.21	0.00	1092.49	0.04	1092.45
0+085	11.68	0.20	58.66	0.49	1151.16	0.53	1150.62
0+090	10.84	0.01	56.30	0.51	1207.46	1.04	1206.42
0+094.55	7.35	0.00	41.39	0.02	1248.85	1.06	1247.79

VOLUMENTOTAL EXCAVACION 1248.85 m³